

VARIANTS

7402 | Shower system


7402|SHOWERSYSTEM

Oras Nova

EANCODE 6414150088230

ACTIVE MARKET AREAS

INT, FIN, NOR, SWE, DNK, RUS, EST, LTU, LVA, UKR

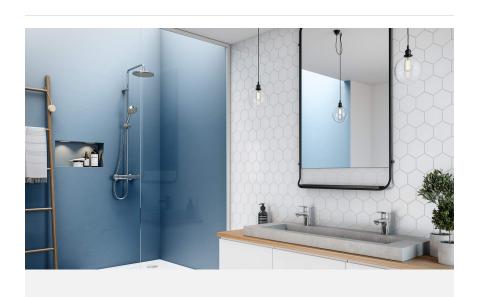



Oras Nova

Oras Nova shower systems' and thermostatic mixers' contemporary design complements all styles of bathrooms, hand showers – and people too! It's well thoughtout ergonomics includes anti-slip handles and ?nger stops, soft edges, a hot water safety lock, and a thermo cool body. What's more, the Oras Nova's EcoFlow limiter helps conserve precious resources – while enhancing your unique shower moment.

Features

Connection

Direct connection, Internal thread

Diverter

Turn operated diverter, Integrated into ?ow control handle

Lever/Handle

Temperature control handle, Flow control handle

Mechanical parts

Ceramic head part for ?ow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter ?lter(s)

Shower parts

Hand shower, Shower rail, Overhead shower, Adjustable shower rail bracket, Shower hose (1750 mm), Variable ?xing points, Rotatable ball joint connection, Anti limescale technology (easy to clean)

Shower spray

Intense	
Special features Flexible length / can be shortened	
Color Chrome	
Temperature Safety stop against scalding at 38°C, The housing of the ?ttings conducts minimal heat	
Flow attributes	
Flow-rate at 300 kPa 0.3 / 0.26 l/s	
Pressure loss with ?ow (0.2 l/s) 180 kPa	
Technical properties	
Connection size G3/4	
DN-size (nominal dimension) DN15	
Hot water supply max. +65°C	
Installation width CCI50±3mm	
Material Brass	
Projection 435 - 460 mm	
Working pressure 100 - 1000 kPa	

Regulations

Noise class I (ISO 3822)